


RunFile_004.drf - BASELINE - Run Conditions: 87.65 °F, 29.34 in-Hg, SAE: 1.02

RunFile_009.drf - SP1204 WITH DRY FLOW TECHNOLOGY - Run Conditions: 89.54 °F, 29.36 in-Hg, SAE: 1.02

DYNOJET RESEARCH

CF: SAE Smoothing: 3

INJEN TECHNOLOGY

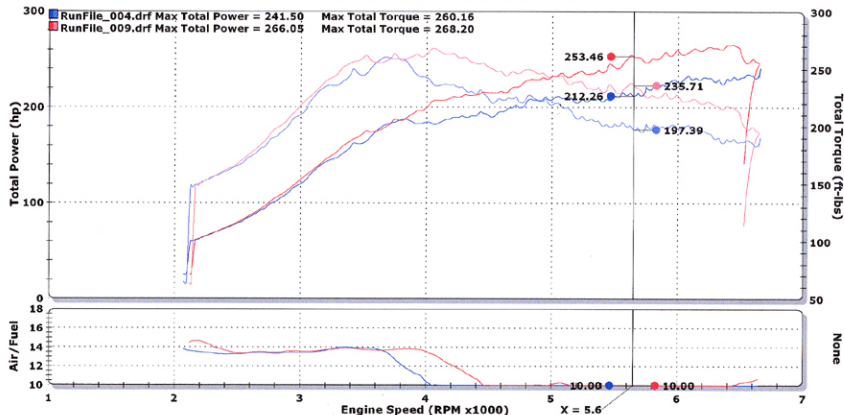

MR-TECHNOLOGY

RunFile_004.drf - BASELINE - Run Conditions: 87.65 °F, 29.34 in-Hg, SAE: 1.02

Run Type: RO Date: 7/28/2008 11:01:50 AM

2008 SUBARU STI.000 6500 MILES 6 SPD.000 3 GEAR PULL

RunFile_009.drf - SP1204 WITH DRY FLOW TECHNOLOGY - Run Conditions: 89.54 °F, 29.36 in-Hg, SAE: 1.02

Run Type: RO Date: 7/28/2008 11:36:40 AM

2008 SUBARU STI.000 6500 MILES 6 SPD.000 3 GEAR PULL